



Cleaner Pen

Fiber Optic Cleaner



Features

- **Push tyle**
- **Thin type to clean SFP on bottom of PCB direct**
- **Both for Adapter/Bulkhead/Receptacle and Patchcord Connector**
- **800+ cleans per unit**
- **Best Cleaning Effect**
- **LC duplex receptacle**
- **Cleaning Cost Save**
- **Used advanced cleaning thread which has better suction oil and dust than present swabs**
- **Easy and Simple and Pocket Portable**
- **Windows for showing the remain cleaning times**
- **Very useful cleaner in fiel**

Specifications


Model Name	PushCleaner
No. of cleanings per unit	800+
Housing Material	Plastic
Cleaning Thread	Special Yarn
Length (included Cap)	160mm
Thickness ¹	13mm
Packing	Individual
Weight	10g

¹ Thickness of PushCleaner is thin to clean Optical Module (Receptacle, SFP) on bottom of PCB direct.



How To Clean

1. Adapter / Bulkhead side: Push to Adapter
2. Connector side: Join Cap and Push to Connector
3. APC side: Push APC side toward APC Key

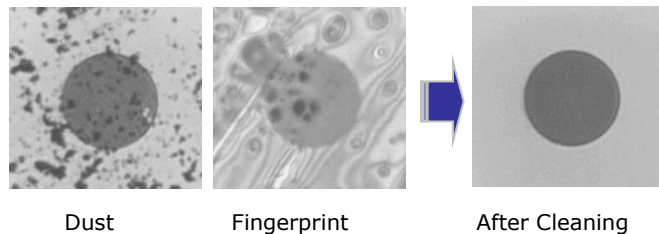

Ordering Information

- PushCleaner-2.5 : For SC / FC / ST / E2000
- PushCleaner-1.25 : For LC / MU
- PushCleaner-2.0 : For 2.0mm LEMO type
- PushCleaner-1.6 : For Harsh Environment 1.6 mm type
- PushCleaner-3.2 : For 3.2mm SMA type

[Note: We can make the Tip for any customer connector and adapter types.]

GalloLight Technology Co., Ltd.

2F., No.181, Zhouzi St., Neihu Dist., Taipei City 11493, Taiwan, R.O.C.

Tel: +886-2-27997121 Fax: +886-2-27997181 sales@galloplight.com www.galloplight.com